


TECHNICAL DATASHEET

VenoPlank® 12+4mm Rustic

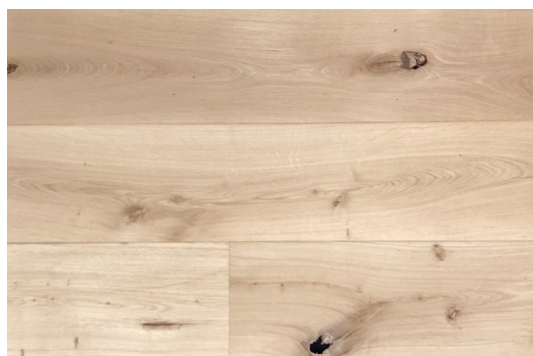

Product Details

Construction	Engineered
Top layer	±4mm
Backing	WBP Exterior Birch ply
Profile	Tongue and Groove
Edge profile	Micro bevel long sides
Thickness	16mm
Width	180, 220 and 260mm
Length	1800 → 2470mm Max. 10% shorter
Grade	Rustic, see photo
Origin	Made In Holland
Janka Hardness	1,120 lbf (4,980N)
Formaldehyde emission	E1
Certifications	FSC, CE (on request)
Reaction to fire	Dfl-s1
Thermal conduct.	0,097 m2 K/W

Installation

Fully bonded	Yes, recommended
Floated	Yes
Floated on underlay	Yes
Over under floor heating	Yes, see Veno guidelines

Grading criteria:

- ✓ Heart allowed
- ✓ Sapwood allowed
- ✓ End check allowed
- ✓ Closed checks allowed
- ✓ Natural knots allowed
- ✓ Filled knots up to 55mm Max
- ✓ Insect damages not allowed
- ✓ Filled side knots allowed
- ✓ All defects will be filled
- ✓ No inner bark allowed

Tolerances

Width	+ and - max 0.1mm
Length	+ and - max 0.1mm
Thickness	+ and - max 0.5mm
Bowing / bend	Maximum ±16mm