


TECHNICAL DATASHEET

VenoPlank® 15+5mm Rustic A

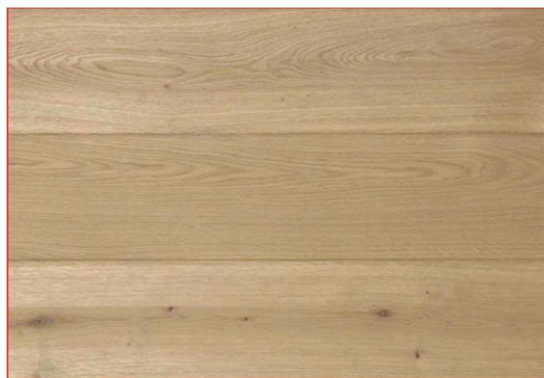

Product Details

Construction	Engineered
Top layer	±5mm
Backing	WBP Exterior Birch ply
Profile	Tongue and Groove
Edge profile	Micro bevel long sides
Thickness	20mm
Width	180, 220 and 260mm
Length	1800 → 2470mm Max. 10% shorter
Grade	Rustic A, see photo
Origin	Made In Holland
Janka Hardness	1,120 lbf (4,980N)
Formaldehyde emission	E1
Certifications	FSC, CE (on request)
Reaction to fire	Dfl-s1
Thermal conduct.	0,122 m2 K/W

Installation

Fully bonded	Yes, recommended
Floated	Yes
Floated on underlay	Yes
Over under floor heating	Yes, see Veno guidelines

Grading criteria:

- ✓ Sapwood not allowed
- ✓ Filled knots up to 25mm
- ✓ Natural knots up to 45mm
- ✓ End checks up to max. 40mm
- ✓ Regular checks up to max. 50mm
- ✓ Natural color variation allowed

Tolerances

Width	+ and - max 0.1mm
Length	+ and - max 0.1mm
Thickness	+ and - max 0.5mm
Bowing / bend	Maximum ±20mm