


## TECHNICAL DATASHEET 12+3mm V46W

### VenoPlank® 12+3mm Rustic

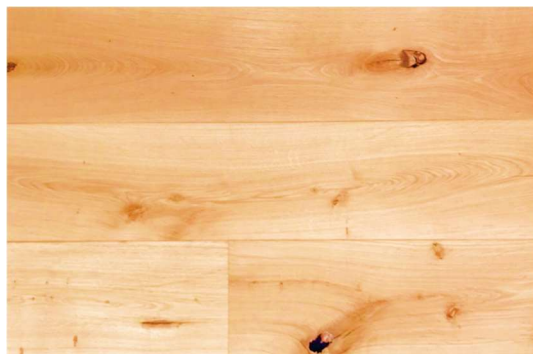

#### Product Details

<b>Construction</b>	Engineered
<b>Top layer</b>	±3mm
<b>Backing</b>	WBP Exterior Birch ply
<b>Profile</b>	Tongue and Groove
<b>Edge profile</b>	Micro bevel long sides
<b>Thickness</b>	15mm
<b>Width</b>	180 and 220mm
<b>Length</b>	1800 → 2470mm Max. 10% shorter
<b>Grade</b>	Rustic, see photo
<b>Origin</b>	Made In Holland
<b>Janka Hardness</b>	1,120 lbf (4,980N)
<b>Formaldehyde emission</b>	To be completed
<b>Finish</b>	Woca 2-laers of Natural Hardwax Oil, UV cured
<b>Certifications</b>	FSC, CE (on request)
<b>Reaction to fire</b>	To be completed
<b>Thermal conduct.</b>	To be completed

#### Installation

<b>Fully bonded</b>	Yes, recommended
<b>Floated</b>	Yes
<b>Floated on underlay</b>	Yes
<b>Over under floor heating</b>	Yes, see Veno guidelines

#### Grading criteria:

- ✓ Heart allowed
- ✓ Small traces of sapwood
- ✓ End check allowed
- ✓ Closed checks allowed
- ✓ Natural knots allowed
- ✓ Filled knots up to 50mm Max
- ✓ Insect damages not allowed
- ✓ Filled side knots allowed
- ✓ All defects will be filled
- ✓ No inner bark allowed

#### Tolerances

<b>Width</b>	+ and - max 0.1mm
<b>Length</b>	+ and - max 0.1mm
<b>Thickness</b>	+ and - max 0.5mm
<b>Bowing / bend</b>	Maximum ±15mm